
# **SWEETWATER AUTHORITY'S**

# ANNUAL DRINKING WATER QUALITY REPORT FOR 2021

Last year the water delivered to you by Sweetwater Authority met all state and federal drinking water health standards.

EL REPORTE CONTIENE INFORMACIÓN IMPORTANTE SOBRE LA CALIDAD DE SU AGUA POTABLE.

Está disponible en nuestro sitio de web www.sweetwater.org/wqreportsp.

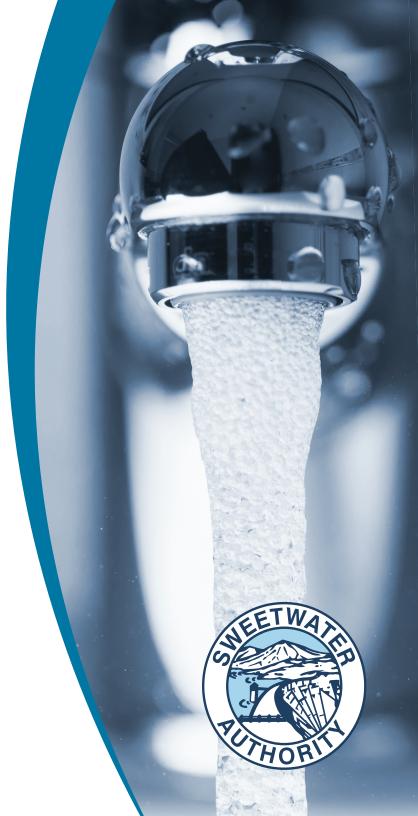



# SWEETWATER AUTHORITY'S TAP WATER SUPPLY MEETS ALL STATE AND FEDERAL HEALTH STANDARDS IN 2021

Sweetwater Authority's mission is to provide customers with safe, reliable water. We are proud to provide this essential service to our community, and through securing sustainable water supplies, regular system maintenance, a balanced approach to human and environmental needs and responsible agency management, we are prepared to continue to do so for generations to come. Behind each drop of water we deliver is a diverse team of dedicated industry professionals who work around-the-clock to ensure our customers have access to safe, high quality tap water every single day.

Based on water quality monitoring data collected in 2021, the Authority's tap water met all state and federal drinking water health standards, which define our current understanding of safe drinking water.

The U.S. Environmental Protection Agency (EPA) and the California State Water Resource Control Board, Division of Drinking Water (State Water Board) mandate all water systems in California to produce an annual report educating customers about their drinking water quality for the previous year. This annual Drinking Water Quality Report details the sources of the Authority's water supply, what it contains and how it meets health standards. If you have questions about Authority operations or the contents of this report, please visit <a href="www.sweetwater.org">www.sweetwater.org</a> or call the Water Treatment Superintendent at (619) 409-6812.

#### **ABOUT SWEETWATER AUTHORITY**

The Authority is a publicly-owned, joint powers water agency, with policies and procedures established by a seven-member Governing Board. Five directors are elected by the citizens of the South Bay Irrigation District. Two directors are appointed by the Mayor of National City, subject to City Council confirmation.

The Authority provides water service to approximately 200,000 people in National City, Bonita, and western and central portions of Chula Vista. Its customers include residential, business, government, and industrial water users in an area covering more than 36 square miles in the South Bay region of San Diego County.



## **GET INVOLVED**

Public participation is welcome at all Sweetwater Authority Governing Board meetings. Meetings are held at 505 Garrett Avenue, Chula Vista, the second and fourth Wednesday of each month at 6:00 p.m. Agendas are posted at 505 Garrett Avenue, Chula Vista. Meeting agendas and minutes are published on the Authority's website at <a href="https://www.sweetwater.org/agendacenter">www.sweetwater.org/agendacenter</a>.

#### **ABOUT YOUR DRINKING WATER**

The sources of drinking water (both tap water and bottled water) include rivers, lakes, streams, ponds, reservoirs, springs, and wells. As water travels over the surface of the land or through the ground, it dissolves naturally-occurring minerals and, in some cases, radioactive material, and can pick up substances resulting from the presence of animals or from human activity.

Before water is treated, raw water may contain contaminants including:

- Microbial contaminants, such as viruses and bacteria, which may come from sewage treatment plants, septic systems, agricultural livestock operations, and wildlife.
- Inorganic contaminants, such as salts and metals, that can be naturally occurring or result from urban stormwater runoff, industrial or domestic wastewater discharges, oil and gas production, mining, or farming.
- Pesticides and herbicides, that may come from a variety of sources such as agriculture, urban stormwater runoff, and residential uses.
- Organic chemical contaminants, including synthetic and volatile organic chemicals that are by-products of industrial processes and petroleum production, and can also come from gas stations, urban stormwater runoff, agricultural applications, and septic systems.
- Radioactive contaminants, that can be naturally occurring or the result of oil and gas production, and mining activities.

To learn more about contaminants and health effects, call the U.S. EPA Safe Drinking Water Hotline at 1-800-426-4791. Further information is available at

www.sweetwater.org or www.mwdh2o.com.

In order to ensure that tap water is safe to drink, the U.S. EPA and the State Water Board prescribe regulations that limit the amount of certain contaminants in water provided by public water systems. The U.S. Food and Drug Administration regulations and California law also establish limits for contaminants in bottled water that provide the same protection for public health.


## ABOUT YOUR DRINKING WATER AND THIS REPORT (CONT.)

#### **OUR WATER SOURCES**

Authority customers receive water from four sources: the Sweetwater River (drawn at Sweetwater Reservoir in Spring Valley), deep freshwater wells in National City, brackish water wells in Chula Vista, and the region's imported supply, which is drawn from the Colorado River and/or the State Water Project in northern California. Source water assessments are available for each of these sources.

#### **PROTECTING WATER FROM CONTAMINATION**


The local water used by the Authority can be affected by activities within its watershed, a 230-square-mile area leading into the streams that feed the Sweetwater River. The Authority uses a multiple-barrier approach to ensure

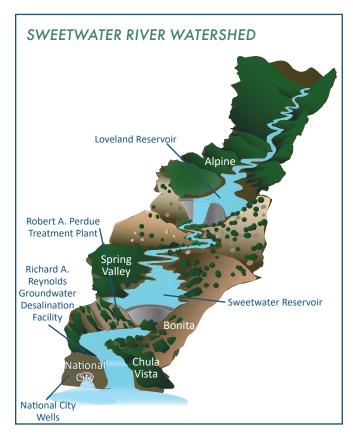











water quality. Education, stakeholder involvement, and comments to local planners are part of Authority efforts, in addition to the "hardware" solutions described here:

- An innovative diversion system captures urban runoff before it enters Sweetwater Reservoir and transports the runoff below Sweetwater Dam, reducing the buildup of mineral salts in the reservoir. The diversion system can also capture and hold runoff from a chemical spill or sewage system failure, allowing the contaminants to be removed and trucked away for proper disposal.
- 2. Well sites are closely monitored to assure that contaminants have not entered the well fields.
- 3. Surface water is treated and disinfected at the Robert A. Perdue Water Treatment Plant.
- 4. Potable groundwater is disinfected.
- Brackish groundwater is treated with reverse osmosis and disinfected. (To learn more, visit www.sweetwater.org/water.)

### **SOURCE WATER ASSESSMENT**

This assessment identifies activities to which water sources are considered "most vulnerable." In 2002, source water assessments were completed for the Authority's water supplies. There were NO contaminants from the "possible contaminating activities" found in the Authority's water supplies. To request a summary of the assessments, contact the Water Quality Services Technician at (619) 409-6805, or cpino@sweetwater.org.

#### **QUESTIONS?**

Frequently asked questions and answers about water quality, taste, color and odor, can be found at <a href="https://www.sweetwater.org/wq">www.sweetwater.org/wq</a>.

# ABOUT YOUR DRINKING WATER AND THIS REPORT (CONT.)

#### IMPORTANT HEALTH INFORMATION

Drinking water, including bottled water, may reasonably be expected to contain at least small amounts of some contaminants. The presence of contaminants does not necessarily indicate that the water poses a health risk. More information about contaminants and potential health effects can be obtained by calling the U.S. EPA Safe Drinking Water Hotline at 1-800-426-4791, or visiting the U.S. EPA website at <a href="https://www.epa.gov/ground-water-and-drinking-water">www.epa.gov/ground-water-and-drinking-water</a>.

Note to special populations: Some people may be more vulnerable to contaminants in drinking water than the general population. Immuno-compromised persons, such as persons with cancer undergoing chemotherapy, persons who have undergone organ transplants, people with HIV/AIDS or other immune system disorders, some elderly, and infants can be particularly at risk from infections. These people should seek advice about drinking water from their health care providers. To obtain U.S. EPA/Centers for Disease Control and Prevention (CDC) guidelines on appropriate means to lessen the risk of infection by Cryptosporidium and other microbial contaminants, please call the U.S. EPA Safe Drinking Water Hotline at 1-800-426-4791.



## **HOW TO REACH US**

#### **CALL**

Customer Service	(619) 420-1413
After Hours Emergency	(619) 420-1413
Water Quality Info	(619) 409-6780
Water Efficiency Helpline	(619) 409-6779
Fluoride Info Line	(619) 409-6780
Construction Info	(619) 409-6850
School Programs	(619) 409-6781
Community Presentations	(619) 409-6723
Board Secretary	(619) 409-6703

### CONNECT

Website: www.sweetwater.org

Facebook: <u>facebook.com/swawater</u>
Twitter: twitter.com/sweetwaterauth

YouTube: <a href="youtube.com/user/SweetwaterAuthority">youtube.com/user/SweetwaterAuthority</a>

LinkedIn: <u>linkedin.com/company/sweetwater-authority</u>

## 2 DEFINITION OF TERMS

**AL = Regulatory Action Level:** The concentration of a contaminant which, if exceeded, triggers treatment or other requirements that a water system must follow (AL now applies only to lead and copper).

MCL = Maximum Contaminant Level: The highest level of a contaminant that is allowed in drinking water. Primary MCLs are set as close to the PHGs (or MCLGs) as is economically and technologically feasible. Secondary MCLs are set to protect the odor, taste, and appearance of drinking water.

MCLG = Maximum Contaminant Level Goal: The level of a contaminant in drinking water below which there is no known or expected risk to health. MCLGs are set by the U.S. EPA.

MRDL = Maximum Residual Disinfectant Level: The

highest level of a disinfectant allowed in drinking water. There is convincing evidence that addition of a disinfectant is necessary for control of microbial contaminants.

MRDLG = Maximum Residual Disinfectant Level Goal: The level of a drinking water disinfectant below which there is no known or expected risk to health. MRDLGs do not reflect the benefits of the use of disinfectants to control microbial contaminants.

**NA = Not Applicable** (No standard specified or no monitoring required)

ND = Not Detected

**NL = Regulatory Notification Level:** (previously known as Action Level). The concentration of a contaminant which, if exceeded, triggers treatment or other requirements that a water system must follow.

**pCi/I = picoCuries per liter** (a measure of radiation).

**PDWS = Primary Drinking Water Standard:** MCLs and MRDLs for contaminants that affect health along with their monitoring and reporting requirements, and water treatment requirements.

**PHG = Public Health Goal:** The level of a contaminant in drinking water below which there is no known or expected risk to health. PHGs are set by the California Environmental Protection Agency (CalEPA).

**ppb = Parts per billion** or micrograms per liter.

**ppm = Parts per million** or milligrams per liter.

**ppt = Parts per trillion** or nanograms per liter.

**TT = Treatment Technique:** A required process intended to reduce the level of a contaminant in drinking water.

PRIMARY STANDARDS For the 2021 calendar year			National City Wells (Disinfected with chloramine)		Treated at Reynolds Groundwater Desal Facility	Treated Robert A. Perd Treatment	due Water	Treated <sup>1</sup> Sweetwater Authority	If you do not see a contaminant listed here, it was not detected in 2021.		
Inorganic		PHG	G Range			- BEFORE TREATME	Drinking Water	Torical Carrier of Cantanaire at			
Contaminants	MCL [MRDL]	(MCLG) [MRDLG]	and Average	National City Well 3	National City Well 4	SD Formation Wells 1- 11	Lake Skinner Outlet (Aqueduct)	Sweetwater Reservoir		Typical Source of Contaminant:	
51			Range	0.4- 0.4	0.4- 0.4	0.1- 0.5	0.3- 0.3	0.3- 0.3	0.6- 0.9 <sup>10</sup>	Erosion of natural deposits; discharge from	
Fluoride (ppm)	2.0	1	Average	0.4	0.4	0.2	0.3	0.3	0.7	fertilizer and aluminum factories; water additive that promotes oral health	
Al (	1000	600	Range	ND	ND	ND	ND	ND - 410 <sup>2</sup>	ND	Erosion of natural deposits; residue from	
Aluminum (ppb)	1000	600	Average	ND	ND	ND	ND	219	ND	surface water treatment processes	
Amania (mmh)	10	0.004	Range	ND	ND	ND- 5.3 <sup>2</sup>	2.1 <sup>2,4</sup>	1.6- 2.3 <sup>2</sup>	ND	Erosion of natural deposits; glass and	
Arsenic (ppb)	10	0.004	Average	ND	ND	1.9	2.1	2.0	ND	electronics production wastes	
Barium (nnm)	1	2	Range	ND	0.1-0.1	0.1 - 0.22	ND	0.1-0.12	ND- 0.1	Erosion of natural deposits; discharges of oil drilling wastes and from metal refineries	
Barium (ppm)	1	2	Average	ND	0.1	0.1	ND	0.1	0.1		
Nickel (ppb)	100	12	Range	ND	ND	ND-10 <sup>2</sup>	ND	ND	ND	Erosion of natural deposits; discharges from	
Μεκει (ρρυ)	100	12	Average	ND	ND	ND	ND	ND	ND	metal factories	
Selenium (ppb)	50	30	30	Range	ND	ND	ND- 18 <sup>2</sup>	ND	ND	ND	Refineries, mines, and chemical waste
эсістаті (рры)	30		Average	ND	ND	5	ND	ND	ND	discharges; erosion of natural deposits; runoff	
Radionuclides (a)						_					
Gross Alpha (pCi/L)	15	(0)	Range	ND	ND	ND - 11 <sup>2,3</sup>	ND - 3.0 <sup>3</sup>	ND	NA	Erosion of natural deposits	
Gross Alpina (pci/L)	13	(0)	Average	ND	ND	3.8	ND	ND	NA	Erosion of flatural deposits	
Gross Beta (pCi/L)	50	(0)	Range	NA	NA	ND- 17 <sup>2,3</sup>	ND- 5.5 <sup>3</sup>	ND - 13 <sup>3</sup>	NA	Decay of natural and man-made deposits	
Gross Beta (pel/L)	30	(0)	Average	NA	NA	8.1	ND	5.7	NA	beedy of flutdraf and fluid fluide deposits	
Radium- 226 (pCi/L)	5	0.05	Range	ND	ND	ND - 1.2 <sup>2,3</sup>	ND	ND	NA	Erosion of natural deposits	
- Tudium 220 (pci/2)	J	0.03	Average	ND	ND	ND	ND	ND	NA	Erosion of flataral deposits	
Radium- 228 (pCi/L)	5	0.019	Range	ND	ND	ND	ND- 1.0 <sup>3</sup>	ND	NA	Erosion of natural deposits	
Tradian 220 (pci, 2)	J	0.015	Average	ND	ND	ND	ND	ND	NA	Erosion of flataral acposits	
Uranium (pCi/L)	20	0.43	0.43	Range	ND	ND	ND - 8.3 <sup>2,3</sup>	1.4 - 2.6 <sup>2,3</sup>	2.1 <sup>2,3,4</sup>	NA	Erosion of natural deposits
XI , ,	_==		Average	ND	ND	2.4	1.9	2.1	NA		
Turbidity <sup>(b)</sup>											
Combined Filter	TT = 1 NTU				Highest S	Single Measurement			0.29		
Effluent Turbidity (NTU)	TT = 95% of samples ≤0.3 NTU	NA		Lowest Monthly Percent of Samples Meeting MCL					100.0%	Soil runoff	

# WATER QUALITY REPORT DATA TABLES (CONT.)

PRIMARY STANDARDS CONTINUED			National City Wells (Disinfected with chloramine)		Treated at Reynolds Groundwater Desal Facility	Treated Robert A. Perc Treatment	lue Water	Treated <sup>1</sup> Sweetwater Authority	If you do not see a contaminant listed here, it was not detected in 2021.			
Inorganic		PHG	Range			- BEFORE TREATME	NT —		Drinking Water	Typical Source of Contaminants		
Contaminants		(MCLG) [MRDLG]	and Average	National City Well 3	National City Well 4	SD Formation Wells 1- 11	Lake Skinner Outlet (Aqueduct)	Sweetwater Reservoir		Typical Source of Contaminant:		
Unregulated Contam	inants <sup>5</sup>											
Boron (ppm)	NA	NL = 1.0	Range	0.23	0.16- 0.17	0.24- 0.50	0.144	0.13- 0.13	0.13-0.23	Runoff/leaching from natural deposits;		
вогон (ррпп)	IVA	NL - 1.0	Average	0.23	0.17	0.32	0.14	0.13	0.18	industrial wastes		
Vanadium (ppb)	NA	NL = 50	Range	ND	14- 14	ND- 3 <sup>2</sup>	ND	6.3- 7.0	ND	Naturally occurring; industrial waste		
W1 /			Average	ND	14	ND	ND	6.7	ND	discharge		
Perfluorooctane- sulfonic acid (PFOS)	NA	NL = 6.5	Range	ND	ND	ND- 26 <sup>2</sup>	ND	NA	ND			
(ppt)	IVA	NL - 0.5	Average	ND	ND	10.4	ND	NA	ND			
Perfluorooctanoic	NA NL = !			NII E 4	Range	ND	ND	ND- 7.7 <sup>2</sup>	ND	NA	ND	Products manufactured with perfluoroalkyl
acid (PFOA) (ppt)		NL = 5.1	NL = 5.1	Average	ND	ND	ND	ND	NA	ND	substances (PFAS) include non-stick cookware, fast-food packaging, stain- and water-repellent	
Perfluorobutane-			Range	ND	ND	ND- 10 <sup>2</sup>	ND	NA	ND	fabrics, including clothing and carpets. PFAS		
sulfonic acid (PFBS) (ppt)	NA	NL = 500	Average	ND	ND	ND	ND	NA	ND	chemicals are also found in fire-fighting foam, wastewater effluent, and in landfills.		
Perfluorohexanesul-	-		Range	ND	ND	ND- 28 <sup>2</sup>	ND	NA	ND			
fonic acid (PFHxS) (ppt)	NA	NL = 2	Average	ND	ND	12.5	ND	NA	ND			
Unregulated Contam	inant Monitoring I	Rule 4 (UCN	1R4) <sup>(c)</sup>									
Total Organic	TT	NA	Range	Perdue Water	Perdue Water Treatment Plant- Raw Water Influent 2.9- 12					Various natural and man-made sources		
Carbon (ppm)	11	INA	Average		(Before Treatm	ent)	8.6	8.6		various natural and man-made sources		
Bromide (ppb)	NA	NA	Range	Perdue Water		- Raw Water Influen	81- 42	20	NA	Runoff/leaching from natural deposits;		
Втотпис (ррв)	IVA	TV/	Average		(Before Treatment)				NA	seawater influence		
Manganese (ppb)	50	NL = 500		Combined Distribution System Range					ND- 10	Leaching from natural deposits		
,				Combined Distribution System Average					3.3			
HAA5 (ppb)	60	NA		Combined Distribution System Range					ND- 38.2 17.3	Byproduct of drinking water chlorination		
				Combined Distribution System Average  Combined Distribution System Range								
HAA6Br (ppb)	NA	NA				•			ND- 39.6 17.0	Byproduct of drinking water chlorination		
	Combined Distribution System Average  Combined Distribution System Range							ND- 66.4				
HAA9 (ppb)	NA	NA				tribution System Ave			30.0	Byproduct of drinking water chlorination		

# WATER QUALITY REPORT DATA TABLES (CONT.)

PRIMARY STANDARDS CONTINUED		(Disinfed	City Wells cted with amine)	Treated at Reynolds Groundwater Desal Facility	Treated at Robert A. Perdue Water Treatment Plant		Treated <sup>1</sup> Sweetwater Authority	If you do not see a contaminant listed here, it was not detected in 2021.		
Inorganic		PHG	Range			- BEFORE TREATM	ENT —		Drinking Water	Typical Source of Contaminant:
Contaminants	MCL [MRDL]	(MCLG) [MRDLG]	and Average	National City Well 3	National City Well 4	SD Formation Wells 1- 11	Lake Skinner Outlet (Aqueduct)	Sweetwater Reservoir		Typical Source of Contaminant.
Disinfection and By-p	oroduct Contamina	ants								
Total Trihalometh-	80	NA		Hig	ghest Locational F	Running Annual Ave	rage (LRAA)		33.0	By-product of drinking water chlorination
anes (TTHMs) (ppb)	80	INA			Range of All D	istribution Sample F	Points		4.1 - 40.2 <sup>6</sup>	by-product of drinking water chlorination
Haloacetic Acids	60	NA NA		Highest Locational Running Annual Average (LRAA)						By-product of drinking water chlorination
(HAAs) (ppb)	00	10.			Range of All D	istribution Sample I	Points		1.0- 33.2 <sup>6</sup>	by product of armining water emormation
Chloramines (ppm)	[4.0]	[4]				ing Annual Average		2.9	Drinking water disinfectant added for	
	( )					istribution System R		0.2- 4.7 <sup>6</sup> ND- 100 <sup>6</sup>	treatment	
Chlorine Dioxide	[800]	[800]		Perdue Plant Clearwell Effluent Range						Drinking water disinfectant added for
(ppb)						Clearwell Effluent Av		ND ND- 0.45 <sup>6</sup>	treatment	
Chlorite (ppm)	1.0	0.05		Combined Distribution System Range						By-product of drinking water disinfection when using chlorine dioxide
						tribution System Av		0.18 100- 390 <sup>6</sup>	<u> </u>	
Chlorate (ppb)	NA	NL = 800		Combined Distribution System Range						By-product of drinking water disinfection when using chlorine dioxide; hypochlorite
					Combined Dis	stribution System Av	280	degradation		
Lead and Copper Rul	e				Number o	f sites found above	e AL	90 pe	ercent of samples	below
Lead (ppb)	AL = 15	0.2			0 sites above A	AL out of 64 sites sa		ND³	Corrosion of onsite plumbing systems	
Copper (ppm)	AL = 1.3	0.3			0 sites above A	AL out of 64 sites sa		$0.14^{3}$	Corrosion of offsite plumbing systems	
Microbiological <sup>(d)</sup> Highest monthly percentage										tage
Total Coliform Bacteria	5.0% (TT)	(0)			Number of positiv	ve samples taken thi	0%	Naturally present in the environment		
E.coli Coliform Bacteria	(d)	(0)			Number of positiv	e samples taken thi		0%	Human and animal fecal waste	
Cryptosporidium	TT	(0)	Range				NA	ND <sup>7</sup>	NA	Naturally present in the environment
(Oocysts/10L)	''	(0)	Average				NA	ND	NA	ivaturally present in the environment

# WATER QUALITY REPORT DATA TABLES (CONT.)

SECONDARY STANDARDS			National City Wells (Disinfected with chloramine)		Treated at Reynolds Groundwater Desal Facility	Treated at Robert A. Perdue Water Treatment Plant		Treated <sup>1</sup> Sweetwater Authority	If you do not see a contaminant listed here, it was not detected in 2021.		
Inorganic		PHG	Range			- BEFORE TREATME	ENT —		Drinking Water		
Contaminants	MCL [MRDL]	(MCLG) [MRDLG]	and Average	National City Well 3	National City Well 4	SD Formation Wells 1- 11	Lake Skinner Outlet (Aqueduct)	Sweetwater Reservoir	Water	Typical Source of Contaminant:	
Aluminum <sup>8</sup> (ppb)	200	NA	Range	ND	ND	ND	ND	ND - 410 <sup>2</sup>	ND	Erosion of natural deposits; residue from	
Aluminum (ppb)	200	INA	Average	ND	ND	ND	ND	219	ND	some surface water treatment processes	
Iron (ppb)	300	l <sub>NA</sub>	Range	ND	ND	ND - 640 <sup>2</sup>	ND	ND - 650 <sup>2</sup>	ND	Leaching from natural deposits; industrial	
ποιτ (ρρυ)	300	IVA	Average	ND	ND	ND	ND	352	ND	wastes	
Manganese (ppb)	50	NL = 500	Range	ND	ND	29 - 3600²	ND	120 - 180²	ND- 33	Leaching from natural deposits	
,		555	Average	ND	ND	726	ND	150	ND	zeasimig irom natarar deposits	
Specific Conduc- tance (microsei-	1600	NA	Range	1100 - 1100	920 - 920	2100 - 10,000²	852 - 927	1100 - 1200	720- 1100	Substances that form ions when in water;	
mens/centimeter)	1000	I IVA	Average	1100	920	3695	890	1150	965	seawater influence	
Total Dissolved	1000	NIA	Range	620 - 700	520 - 590	1200 - 6900²	508 - 611	650 - 730	410- 650	Runoff/leaching from natural deposits;	
Solids (ppm)	1000	NA	Average	660	555	2281	560	690	563	seawater influence	
Chlorido (nom)	Chloride (ppm) 500	NIA	Range	210 - 220	150 - 170	480 - 3300²	84 - 92	190 - 210	160- 250	Runoff/leaching from natural deposits;	
Chloride (ppm)		NA	Average	215	160	1041	88	200	190	seawater influence	
Sulfata (nnm)	ate (ppm) 500 N	NA	Range	59 - 60	38 - 38	128 - 540²	170 - 203	110 - 117	36- 167	Runoff/leaching from natural deposits;	
Sullate (ppill)		IVA	Average	59	38	205	186	114	97	industrial wastes	
Color (units)	15	15	NA	Range	1 - 3	1 - 3	1 - 3	3 - 5	40 - 50	1	Naturally occurring organic materials; iron and
Color (units)	15	INA	Average	2	2	1	4	45	1	manganese	
Odor-Threshold	3	NA	Range	ND	ND	ND - 1 <sup>2</sup>	6 <sup>2,4</sup>	4-42	ND	Naturally occurring organic materials	
(units)	3	INA	Average	ND	ND	ND	6	4	ND	Naturally occurring organic materials	
Turbidity <sup>8</sup> (NTU)	5	NA NA	Range	0.1 - 0.2	0.1 - 0.1	0.1 - 0.6	0.5 - 1.0	3.5 - 12	0.1- 0.4	Soil runoff	
Tarbiatty (1410)	J	IVA	Average	0.1	0.1	0.2	0.7	7.8	0.2	Son runon	
Foaming Agents	500	NA NA	Range	ND	ND	ND - 110	ND	ND - 100	ND	Municipal and industrial waste discharges	
(MBAS) (ppb)	300	10.	Average	ND	ND	5	ND	50	ND	Wallerpar and madstrial waste discharges	
OTHER PARAMETER	RS										
			Range	170- 170	130- 130	280 - 1500²	81-91	120- 140	100- 120	Runoff/leaching from natural deposits;	
Sodium (ppm)	NA	NA	Average	170	130	506	86	130	110	seawater influence	
Hardness (Total			Range	200- 200	170- 170	320 - 2000²	242- 273	300-310	94- 300		
Hardness as CaCO <sub>3</sub> ) (ppm)	NA	NA	Average	200	170	701	258	305	211	Leaching from natural deposits	
Dadan /nC:/1\9	NIA	NIA	Range	270 <sup>4</sup>	374 <sup>4</sup>	190 - 300²	ND	NA	NA Danie of material dans	Decou of natural densaits	
Radon (pCi/L) <sup>9</sup>	NA	NA	Average	270	374	240	ND	NA	NA	Decay of natural deposits	
pH (Standard Units)	NA	NA	Range	7.9- 7.9	7.9- 7.9	7.4- 8.0	8.3-8.4	7.9-8.2	7.9- 8.6	Soil geology, water hardness, and alkalinity	
pri (Stanuaru Units)	INA	INA	Average	7.9	7.9	7.8	8.3	8.1	8.2	Son geology, water hardness, and disdiffity	
Total Organic	TT	NA	Range	NA	NA	NA	2.9-3.2	10.1- 13.0	1.7- 8.7	Various natural and man-made sources	
Carbon (ppm)	''	INA	Average	NA	NA	NA	3.1	11.5	6.2	various fiatural and man-made sources	

## **INFORMATIONAL STATEMENTS**

The Authority vigilantly safeguards its water supplies and has met all state and federal health standards. The following information describes potential health effects of drinking water that contain contaminants above federal maximum levels.

RADON: Radon is a radioactive gas that you cannot see, taste, or smell. It is found throughout the U.S. Radon can move up through the ground and into a home through cracks and holes in the foundation. Radon can build up to high levels in all types of homes. Radon can also get into indoor air when released from tap water through showering, washing dishes, and other household activities. In most cases, the amount of radon entering a home from tap water will be much less than the amount of radon entering the home through soil. Radon is a known human carcinogen. Breathing air containing radon can lead to lung cancer. Drinking water containing radon may also cause increased risk of stomach cancer. If you are concerned about radon in your home, test the air in your home. Testing is inexpensive and easy. You should pursue radon removal for your home if the level of radon in your air is 4 picocuries per liter of air (pCi/L) or higher. For additional information, call the State Radon Program (1-800-745-7236), the U.S. EPA Safe Drinking Water Hotline (1-800-426-4791), or the National Radon Hotline (1-800-767-7236).

**LEAD:** If present, elevated levels of lead can cause serious health problems, especially for pregnant women, infants, and young children. Lead in drinking water is primarily from materials and components associated with service lines and household plumbing. The Authority is responsible for providing high quality drinking water, but cannot control the variety of materials used in household plumbing components. When your water has been sitting for several hours, you can minimize the potential for lead exposure by flushing your tap for 30 seconds to two minutes before using water for drinking or cooking. If you are concerned about lead in your water, you may wish to have your water tested.

Information on lead in drinking water, testing methods, and steps you can take to minimize exposure is available from the U.S. EPA Safe Drinking Water Hotline (1-800-426-4791) or at <a href="https://www.epa.gov/lead">www.epa.gov/lead</a>.

**FLUORIDE** is a naturally occurring mineral found in both surface water and groundwater. Fluoridation is the addition of fluoride to a drinking water supply so that it contains the level recommended for optimal protection against tooth decay. California law mandates fluoridation. Public water systems with at least 10,000 service connections are required, once funded, to fluoridate their drinking water. The Authority began fluoridation of the water supply delivered to customers in January 2017. This action is in compliance with the State Water Board Regulations Related to Drinking Water (Section 64433). State regulations require the fluoride levels in the treated water be maintained within a concentration range of 0.6 mg/L to 1.2 mg/L with the optimal target dose set at 0.7 mg/L, which is considered to provide optimal oral health benefits. Additional information about fluoridation is available from the State Water Board Division of Drinking Water at www.swrcb.ca.gov/drinking\_water/certlic/drinkingwater/Fluoridation.shtml.



- 1. Sweetwater Authority drinking water data is representative of water which has been processed through the Robert A. Perdue Water Treatment Plant (conventional treatment) or the Richard A. Reynolds Groundwater Desalination Facility (reverse osmosis treatment).
- **2. The contaminants** listed are in the untreated waters. The water is processed through either a reverse osmosis filtration plant (Reynolds Groundwater Desalination Facility) or through a conventional water treatment plant (Perdue Water Treatment Plant). These water treatment applications typically remove these contaminants to concentrations below detectable levels.
- **3.** The State Water Board allows the Authority to monitor for some contaminants less than once per year because the concentrations of the contaminants do not change frequently. Radiological data on untreated source waters was collected in 2006-2007, 2017-2021. Lead and Copper data was collected in July 2020. Compliance with the lead and copper action levels is determined at the 90<sup>th</sup> percentile.
- **4. Reported value** represents a single measurement; therefore, the range and average are the same.
- **5. Unregulated contaminant** monitoring helps U.S. EPA and the State Water Board to determine where certain contaminants occur and whether the contaminants need to be regulated.

On March 15, 2019, the State Water Board, Division of Drinking Water (DDW) issued an Order requiring the Authority to conduct quarterly monitoring for one year for per- and poly-fluorinated alkyl substances (PFAS) at three San Diego Formation Wells (SDF 1, 2, and 6), which are used as a source of supply to the Reynolds Desalination Facility. These wells were selected because they are located in proximity to an abandoned landfill in National City. Based upon monitoring results for SDF Wells 1, 2, and 6, and the concern for the potential of PFAS contamination in SDF Wells located along the Lower Sweetwater River, on September 3, 2020, DDW issued a new monitoring Order that required the Authority to monitor SDF Wells 2, 3, 4, and 5 quarterly until further

notice. On March 2, 2021, DDW issued a third monitoring Order which required monitoring at National City Wells 2, 3 and 4, however no PFAS chemicals were detected in 2021. Of the PFAS chemicals, perfluorooctanoic acid (PFOA) and perfluorooctane sulfonic acid (PFOS) have been the most extensively studied and DDW has assigned health-based notification levels of 5.1 and 6.5 parts per trillion (ppt) respectively to these chemicals. On Janary 14, 2021, the State Water Board established a notification level for Perfluorobutane Sulfonic Acid (PFBS) of 500 ppt. On March 17, 2022, the State Water Board established a notification level for Perfluorohexane Sulfonic Acid (PFHxS) of 2 ppt. In addition, the State Water Board is currently in the process of developing public health goals (PHGs) and maximum contaminant levels (MCLs) for PFOS and PFOA. In 2021, both PFOA and/or PFOS were detected in SDF Wells 2, 3, and 5 above their respective notification levels, however the reverse osmosis technology used at the Reynolds Desalination Facility effectively removes these chemicals to below detectable levels, therefore there was no impact to our customers and no notification was required. This was confirmed with the State Water Board by sampling the Reynolds Desalination Facility finished water, which showed that none of the 18 PFAS chemicals tested by EPA Method 537.1 were detected. For more information on PFAS, visit www.sweetwater.org/wg.

- **6. MRDL compliance for chloramines** is determined on a system-wide basis by calculating a running annual average of all distribution sampling point averages. MCL compliance for trihalomethanes (TTHMs) and haloacetic acids (HAAs) is determined by calculating a quarterly locational running annual average at each Stage 2 DBP Rule monitoring location. MCL compliance for chlorine dioxide is based on daily samples at the entrance to the distribution system and follow-up distribution system monitoring following an MRDL exceedance. MCL compliance for chlorite is based on daily samples at the entrance to the distribution system, monthly distribution system monitoring, and follow-up/confirmation sampling following an MCL exceedance.
- **7. Cryptosporidium (Crypto) monitoring.** In 2021, Crypto was not detected in Sweetwater Reservoir. The last

- detection for Crypto in Sweetwater Reservoir occurred in August of 2005 (1.0 oocyst in 10 liters).
- **8. Aluminum and Turbidity** have both a primary and a secondary MCL.
- **9. Radon** was sampled in 2000 for San Diego Formation Wells 1-5, in 2001 for the National City Wells 2 and 3, and in 2008 for San Diego Formation Well 6 and National City Well 4.
- 10. Fluoride The Authority treats your water by adding fluoride to the naturally occurring level to help prevent tooth decay in consumers. State regulations require the fluoride levels in the treated water be maintained within a concentration range of 0.6 mg/L to 1.2 mg/L with an optimal target dose set at 0.7 mg/L, which is considered to provide optimal oral health benefits. In 2021, the Authority's monitoring showed fluoride levels in the (fluoridated) treated water ranged from 0.6 mg/L to 0.9 mg/L, with an average of 0.7 mg/L. Information about fluoridation, oral health and current issues is available at <a href="www.swrcb.ca.gov/drinking\_water/certlic/drinkingwater/Fluoridation.shtml">www.swrcb.ca.gov/drinking\_water/certlic/drinkingwater/Fluoridation.shtml</a>.
- (a) Compliance with the radiological MCLs is typically based upon samples collected every three to nine years (depending on previous monitoring results), unless waived by the State Water Board. Compliance with the gross alpha MCL is determined by excluding the values for radon and uranium. The State Water Board considers 50 pCi/L to be the level of concern for beta particles. The MCL for radium is for the combination of the "226" and "228" isotopes.
- **(b)** The turbidity level of the filtered water shall be less than or equal to 0.3 NTU (Nephelometric Turbidity Units) in 95 percent of the measurements taken each month and shall not exceed 1.0 NTU for more than eight consecutive hours or 1 NTU for more than one continuous hour and none of the 4-hour interval readings shall exceed 1 NTU.

Turbidity is a measure of the cloudiness of the water. The Authority monitors turbidity because it is a good indicator of the effectiveness of our filtration system.

(c) Quarterly UCMR4 monitoring was conducted in 2018 - 2019 for the 17 List 1 chemicals and the 11 List 2 chemicals.

# **FOOTNOTES (CONT.)**

Of these, only TOC, bromide, manganese, and haloacetic acids were detected. For UCMR4, the haloacetic acids are reported in three groups (HAA5, HAA6Br, and HAA9), as follows:

**HAA5** equals the sum of monochloroacetic acid, dichloroacetic acid, trichloroacetic acid, monobromoacetic acid, and dibromoacetic acid.

**HAA6Br** equals the sum of monobromoacetic acid, dibromoacetic acid, bromochloroacetic acid, bromodichloroacetic acid, chlorodibromoacetic acid, and tribromoacetic acid.

**HAA9** equals the sum of monochloroacetic acid, dichloroacetic acid, trichloroacetic acid, monobromoacetic acid, dibromoacetic acid, bromochloroacetic acid, bromodichloroacetic acid, chlorodibromoacetic acid, and tribromoacetic acid.

In addition to UCMR4, the Authority routinely monitors for HAA5 and TOC as part of the Disinfection By-products Rule.

(d) This Consumer Confidence Report (CCR) reflects changes in drinking water regulatory requirements during

2021. These revisions add the requirements of the federal Revised Total Coliform Rule, effective since April 1, 2016, to the existing state Total Coliform Rule. The revised rule maintains the purpose to protect public health by ensuring the integrity of the drinking water distribution system and monitoring for the presence of microbials (i.e., total coliform and E. coli bacteria). The U.S. EPA anticipates greater public health protection as the rule requires water systems that are vulnerable to microbial contamination to identify and fix problems. Water systems that exceed a specified frequency of total coliform occurrences are required to conduct an assessment to determine if any sanitary defects exist. If found, these must be corrected by the water system. The state Revised Total Coliform Rule became effective July 1, 2021.

State of California Total Coliform Rule (CA TCR) - Total coliform MCL: No more than 5.0% of the monthly samples may be total coliform positive. Acute coliform (E.coli) MCL: A routine sample and a repeat sample are total coliform positive, and one of these is also E.coli positive. The Authority did not violate either MCL in 2021. Results are based on the distribution system's highest monthly

percent positives. Compliance is based on the combined distribution system sampling from all treatment plants. In 2021, 1,872 samples were analyzed. Please note from January 1, 2021, through June 30, 2021, compliance with the CA TCR was still required, however on July 1, 2021, the State Water Board DDW formally adopted the Revised Total Coliform Rule into California's Drinking Water Regulations.

Federal Revised Total Coliform Rule (RTCR) - Total Coliform TT trigger, Level 1 assessments, and total coliform TT violations: More than 5.0% total coliform positive samples in a month trigger a Level 1 assessment. Failure to conduct an assessment and take corrective action within 30 days is a total coliform violation. In 2021, no triggers, Level 1 assessments, or violations occurred.

E.coli MCL and Level 2 TT triggers for assessments: Routine and repeat samples are total coliform positive and either sample is E.coli positive or the system fails to collect all repeat samples following an E.coli positive sample, or fails to test for E.coli when the repeat sample is total coliform positive. In 2021, no samples were E.coli positive and no MCL violations or assessments occurred.

## UNDERSTANDING WATER


Water quality standards are measured in "parts per million" or "parts per billion." But those terms can be difficult to relate to, and it's hard to know what they mean. This chart can help you visualize the proportions in terms of some ordinary items.

ITEI	M	PARTS PER MILLION	PARTS PER BILLION		
Linear Measure	ON SECTION OF THE PROPERTY OF	1 inch in 15.78 miles	1 inch in 15,780 miles		
Time		1 minute in 1.9 years	1 minute in 1,902 years		
Money		1 cent in \$10,000	1 cent in \$10 million		
1 drop of water		1 drop in a half-full bathtub	1 drop in an Olympic- size swimming pool		

Source: U.S. EPA;

Alaska Department of Environmental Conservation:

**Sweetwater Authority** 

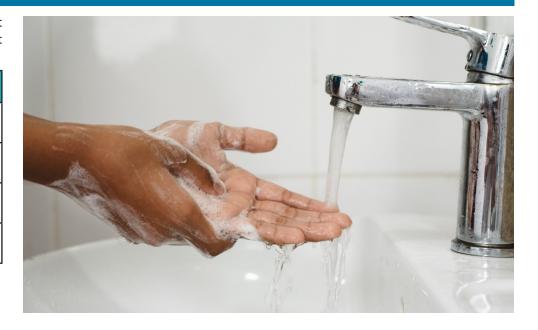

# A CLEAN WATER SUPPLY IS THE NORM THANKS TO MODERN WATER TREATMENT

Modern treatment techniques have improved water supplies to the point where people often take the safety of tap water for granted.

However, ensuring water quality is a big commitment. Local and regional water agencies work around-the-clock to make sure customers have safe, reliable drinking water.

A century ago, however, many people did not have access to safe, reliable water. That was why filtration and chlorination systems were first installed in municipal water systems.

That seemingly basic service made a profound difference; U.S. life expectancy increased and child mortality decreased. Once-common diseases such as cholera and typhoid have been essentially wiped out.

Continuous advances in technology have allowed water agencies to adopt increasingly sophisticated ways of preventing harmful levels of bacteria and chemicals from fouling water supplies.

Federal and state agencies oversee the testing process, periodically setting more stringent safeguards. Over the past 30 years, the number of regulated contaminants in potable water has nearly quadrupled; and contaminant levels that once were measured in parts per million are now traced to parts per billion – giving consumers an even greater margin of safety.

The entire process has delivered a major public health benefit, a real value that customers help pay for a little at a time.

# Public water providers just charge what it costs to deliver safe supplies

Every few months when corporations publicly announce their revenues, shareholders expect a big return. Some multi-national energy companies routinely post annual profits in the billions.

Not so for the public agencies which deliver another crucial resource – water – right to your home or business every day. They make \$0 profit annually. In fact, agencies



such as the Authority are legally required to charge only what it costs to treat and deliver drinking water.

All the money collected is invested into the pumps, pipes, and other elements of the water system. The system is complex, and includes securing supplies; pumping, moving, treating, and testing water; maintaining and financing infrastructure; and establishing financial reserves for emergencies and paying for environmental enhancements or mitigation.

Related costs have grown over time due to a variety of factors, such as increases in the price of energy and treatment chemicals. Local water suppliers are also strategically increasing the use of local sources, such as recycled water and groundwater, to buffer our region from shortages.

In all those efforts, customers of public water agencies can be confident that they are paying the actual costs of providing safe and reliable water service – a real value day in and day out.

The Authority is committed to maintaining a safe and reliable supply of drinking water for current and future customers.



SWEETWATER AUTHORITY 505 Garrett Avenue Chula Vista, CA 91910 (619) 420-1413